



Job \_\_\_\_\_ Item No. \_\_\_\_\_

# Star® Self-Contained Refrigerated Countertop Server

□RCR4



RCR4

## DESCRIPTION

RCR4 is a self-contained refrigerated counter top system that is designed to hold toppings, condiments, or practically any food at NSF-7 safe temperatures. The RCR4 includes cold well refrigeration, foamed-in place insulation, stainless steel construction, 4 each easily removable pans, 1/2" feet and 4' cord & plug. Meets NSF-7 Food Safe Requirements at 35°F. R-134A Refrigerant, 1/16-HP compressor @ 300 BTUH.

## SPECIFICATIONS

RCR4 features all stainless steel exterior construction, 1/2" - rubber feet, 4' cord & NEMA 5-15P plug with strain relief. Comes with 4-each easily removable 6"-deep 1/6th - size clear, polycarbonate inset pans with hinged lids and will accommodate any equivalent assortment of 2/3rd-size, 1/3rd - size, 1/6th -size or 1/9th -size pans. Features adjustable temperature controls with digital read-out and lighted on/off rocker switch. RCR4 is NSF-7 compliant @35° F product temperature utilizing a 1/16-HP compressor, 300 BTUH and R-134A refrigerant, 120V, 60 HZ.

## WARRANTY

These units come with a one [1] year warranty for parts and labor. STAR5 optional extended warranty available for purchase.

## FEATURES

- Self-contained refrigeration system with 1/16-HP compressor @ 300BTUH, using R-134A refrigerant
- Includes 4-each removable 1/6th - size, 6" deep, clear polycarbonate inset pans with hinged lids
- Accommodates 2/3rd, 1/3rd, 1/6th and 1/9th size pans with adapter bar to support smaller fractional pans - (4) 1/6-pan capacity, (2) 1/3 pan capacity
- NSF-7 Compliant at 35F product temperature - Sanitation approved for pans in depths from 2" to 6" deep
- Foamed-in-place insulation
- All 16 & 20 gage stainless steel inside & out
- 1/2" rubber feet
- 4' cord & NEMA 5-15P plug with strain relief
- 120V, 60HZ
- Adjustable temperature controls with digital read-out and lighted on/off rocker switch

## CERTIFICATIONS



### STAR MANUFACTURING INTERNATIONAL INC.


10 Sunnen Drive • Saint Louis, Missouri 63143  
Telephone 800 264 7827 • Fax 314 781 5445  
www.star-mfg.com

Printed in the U.S.A. • 2M-ZZxxxx • Rev - • 3.2017  
Specifications are subject to change without notice and are not intended for installation purposes.




# Star® Self-Contained Refrigerated Countertop Server


□RCR4

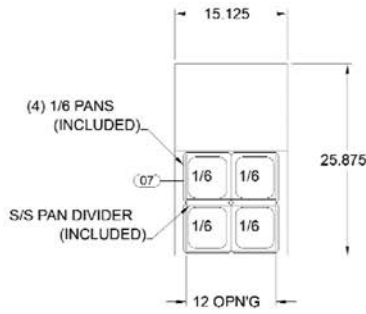


**PLAN VIEW**  
SCALE: 3/4"=1'-0"




**VARIOUS OTHER PAN ARRANGEMENTS**  
(PANS BY OTHERS)




**SIDE VIEW**  
SCALE: 3/4"=1'-0"




**FRONT VIEW**  
SCALE: 3/4"=1'-0"



**SIDE VIEW**  
SCALE: 3/4"=1'-0"



**REAR VIEW**  
SCALE: 3/4"=1'-0"

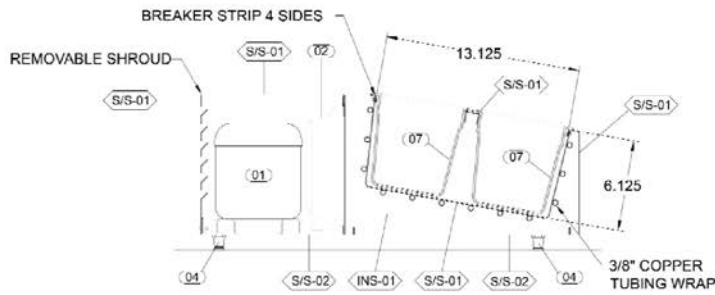

**SECTION 1**

**SYMBOL DETAILS**

- 01 Compressor; 115V, 60 HZ, 300 BTUH, R-134A
- 02 Temperature Control
- 03 Lighted On/Off rocker Switch
- 04 Adjustable Feet with Rubber Toe
- 05 4' Power Cord with NEMA 5-15P Plug
- 06 Strain Relief
- 07 1/6th Size, 6" deep Poly Carbonate Inset Pans with Hinged Lids
- 08 Logo
- S/S-01 20 Gauge Stainless Steel
- S/S-02 16 Gauge Stainless Steel
- S/S-01 20 Gauge Stainless Steel
- S/S-01 16 Gauge Stainless Steel
- INS-01 Foamed-In-Place Polyurethane Insulation

**CLEARANCES**

These units can be installed on non-combustible countertops using the provided feet. The back and both sides must be at least one [1] inch (25.4 mm) from any combustible surface.

MODEL	DESCRIPTION	OPENING SIZE in. (mm)	HEIGHT in. (mm)	WIDTH in. (mm)	DEPTH in. (mm)	VOLTS	COMPRESSOR HP	AMPS	WATTS	NEMA PLUG	APPROX. SHIP WEIGHT
RCR4	(4) 1/6-pan capacity (2) 1/3 pan capacity	12x12 (305mm x 305mm)	10.5 (267)	15.13 (384)	25.88 (655)	120	1/16	13.8	240	5-15P	70 lb. (33.6 kg)



5-15P

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



**STAR MANUFACTURING INTERNATIONAL INC.**

10 Sunnen Drive • Saint Louis, Missouri 63143  
Telephone 800 264 7827 • Fax 314 781 5445  
www.star-mfg.com

Printed in the U.S.A. • 2M-Z2xxxx • Rev - • 3.2017  
Please refer to the owner's manual for information regarding installation or use.